

The shortest path problem on chola period built temples with Dijkstra's algorithm in intuitionistic triangular neutrosophic fuzzy graph

K. Kalaiarasi

PG and Research Department of Mathematics

Cauvery College for Women (Affiliated to Bharathidasan University)

Tiruchirappalli 620018, Tamil Nadu

India

kkalaiarasi.maths@cauverycollege.ac.in

R. Divya

PG and Research Department of Mathematics

Cauvery College for Women (Affiliated to Bharathidasan University)

Tiruchirappalli 620018, Tamil Nadu

India

rdivyamat@gmail.com

Vishnu Narayan Mishra*

Department of Mathematics

Indira Gandhi National Tribal University

Lalpur, Amarkantak 484 887, Anuppur

Madhya Pradesh

India

vnm@igntu.ac.in

vishnunarayanmishra@gmail.com

Abstract. In this article, Intuitionistic Triangular Neutrosophic Fuzzy Graph of Shortest Path Problem was Inaugurated, which is drew on triangular numbers and Intuitionistic Neutrosophic Fuzzy Graph. Real-world application is given as an illustrative model for Intuitionistic Triangular Neutrosophic Fuzzy Graph. Here we introduced famous chola period temples. These types of temples built in various king of cholas. Here we assume only seven types of temples as vertices of Intuitionistic Triangular Neutrosophic Fuzzy Graph. Use of fuzzification method, edge weights of this Graph was calculated. Score function of Intuitionistic Triangular Neutrosophic Fuzzy Graph is inaugurated, with the help of this score function in the proposed algorithm, shortest way is determined.. This present Chola period temples Shortest Path Problem. Obtained shortest path is verified through Dijkstra's Algorithm with the help of Python Jupyter Notebook (adaptation) programming.

Keywords: Intuitionistic Fuzzy Number (IFN), Triangular Fuzzy Number (TFN), Shortest Path (SP), Intuitionistic Triangular Neutrosophic Fuzzy Graph(ITNFG).

*. Corresponding author

1. Introduction

The creators of, Ahuja [1] examined systematic execution of Dijkstra's calculation. Arsham [2] introduced another crucial arrangement calculation which permits affectability examination without utilizing any counterfeit, slack or surplus factors. Anusuya [3] apply positioning capacity for briefest way issue. Broumi [4] proposed for extend esteemed Neutrosophic Number. Broumi [5] presented Neutrosophic charts with most limited way issues. Broumi [6] proposed calculation gives Shortest way issue on single esteemed Neutrosophic charts. Broumi [7] proposed the Shortest way under Bipolar Neutrosophic setting. Broumi [8] gave the Shortest way issue under span esteemed Neutrosophic setting. Chiranjibe Jana [9] Presented Trapezoidal Neutrosophic aggregation operators and its application in multiple attribute decision making process. De [10] Computation of Shortest Path in a Fuzzy organization. De [11] Study on Ranking of Trapezoidal Intuitionistic Fuzzy Numbers. Enayattabar [12] introduced Dijkstra calculation for briefest way issue under Pythagorean Fuzzy climate. Jana [13] presented stretch esteemed Trapezoidal Neutrosophic Set. Jayagowri [14] discover Optimized Path in a Network utilizing Trapezoidal Intuitionistic Fuzzy Numbers. Kalaiarasi [15] determine fuzzy optimal total cost and fuzzy optimal order quantity obtained by Ranking function method and Kuhn-tucker method for the proposed Inventory model. Kalaiarasi [16] constructed Inventory parameters that are Fuzzy using Trapezoidal Fuzzy Numbers. Kumar [17] proposed to tackling briefest way issue with edge weight. Kumar [18] introduced Algorithm for most limited way issue in an organization with span esteemed Intuitionistic Trapezoidal Fuzzy Number. Kumar [19] presented the SPP from an underlying hub to an objective hub on Neutrosophic chart. Majumdar [20] introduced an Intuitionistic Fuzzy most brief way organization. Nagoor Gani [21] looking Intuitionistic Fuzzy most brief organization. Ojekudo Nathaniel akpofure [22] tended to the most brief way utilizing Dijkstra's calculation. Said broumi [23] processing the most brief way Neutrosophic Information. Smarandache [24] summed up the Fuzzy rationale and presented two Neutrosophic ideas. Victor christianto [25] gave a Neutrosophic approach to futurology. Wang [26] contributed Neutrosophic sets with their properties. Xu [27] introduced a strategies for amassing span esteemed Intuitionistic Fuzzy data, Yang [28] introduced rectangular hindrance subject to various improvement capacities regarding the quantity of curves. Ye [29] proposed a Trapezoidal Fuzzy Neural Computing and Applications. Ye [30] developed of the Multi models dynamic strategy utilizing shape liking measure, Ye [31] presented a Prioritized aggregation operators of Trapezoidal Intuitionistic Fuzzy Sets and their Application.

Fuzzy graph theory is finding an increasing number in developing real time applications in modeling systems with accuracy varying at different levels of information. The fuzzy set theory can play a significant role in this kind of decision making environment to tackle the unknown or the vagueness about the time duration of activities in a project network. To effectively deal with the

ambiguities involved in the process of linguistic estimate times. In the applied field, the success of the use of fuzzy set theory depends on the choice of the membership function that we make. However, there are applications in which experts do not have precise knowledge of the function that should be taken. In these cases, it is appropriate to represent the membership degree of each element of the fuzzy set by means of an interval. From these considerations arises the extension of fuzzy sets called the theory of interval-valued fuzzy sets. That is, fuzzy sets such that the membership degree of each element of the fuzzy set is given by a closed subinterval of the interval $[0,1]$. Replacing the membership function of vertices and edges in fuzzy graphs by interval-valued fuzzy sets such that they satisfy some particular conditions, interval valued fuzzy graphs (IVFG) were defined. Thus IVFG provide a better description of vagueness and uncertainty within the specific interval than the traditional fuzzy graph.

Triangular intuitionistic fuzzy numbers

Triangular intuitionistic fuzzy numbers (TIFNS) are a special kind of intuitionistic fuzzy sets (IFSS) on a real number set. TIFNs are useful to deal with ill-known quantities in decision data and decision making problems themselves.

Dijkstra's Algorithm

The shortest path algorithm is given a weighted graph or digraph $G = (V, E, W)$ and two specified vertices V and W ; the algorithm finds a shortest path from V to W . The distance from a vertex V to a vertex W (denote $d(V, W)$) is the weight of a shortest path from V to W . Dijkstra's shortest path algorithm will find the shortest paths from V to the other vertices in order of increasing distance from V . The algorithm stops when it reaches W .

Here, in this paper disclosed the briefest way to Chola period temples utilized the proposed calculation.

Intuitionistic fuzzy number gives more accuracy than fuzzy numbers. So that intuitionistic fuzzy numbers are used for finding shortest path of a graph. In this paper Dijkstra's algorithm is the only algorithm suitable for verifying our real world problem, because of the edge weight of fuzzy graph, rather than other algorithms.

2. Methodology

In this section, we explain important notions of Intuitionistic Fuzzy Sets.

Definition 2.1 ([9]). Let $\bar{n}_1 = [(t_1, t_2, t_3), (t_4, t_5, t_6)], [(i_1, i_2, i_3), (i_4, i_5, i_6)], [(f_1, f_2, f_3), (f_4, f_5, f_6)]$ and $\bar{n}_2 = [(T_1, T_2, T_3), (T_4, T_5, T_6)], [(I_1, I_2, I_3), (I_4, I_5, I_6)], [(F_1, F_2, F_3), (F_4, F_5, F_6)]$. Therefore, the conditions are

1. $\bar{n}_1 \oplus \bar{n}_2 = \langle [(t_1 + T_1 - t_1T_1, t_2 + T_2 - t_2T_2, t_3 + T_3 - t_3T_3), (t_4 + T_4 - t_4T_4, t_5 + T_5 - t_5T_5, t_6 + T_6 - t_6T_6)], [(i_1I_1, i_2I_2, i_3I_3), (i_4I_4, i_5I_5, i_6I_6)], [(f_1F_1, f_2F_2, f_3F_3), (f_4F_4, f_5F_5, f_6F_6)] \rangle$.
2. $\bar{n}_1 \otimes \bar{n}_2 = \langle [(t_1T_1, t_2T_2, t_3T_3), (t_4T_4, t_5T_5, t_6T_6)], [(i_1 + I_1 - i_1I_1, i_2 + I_2 - i_2I_2, i_3 + I_3 - i_3I_3), (i_4 + I_4 - i_4I_4, i_5 + I_5 - i_5I_5, i_6 + I_6 - i_6I_6)], [(f_1 + F_1 - f_1F_1, f_2 + F_2 - f_2F_2, f_3 + F_3 - f_3F_3), (f_4 + F_4 - f_4F_4, f_5 + F_5 - f_5F_5, f_6 + F_6 - f_6F_6)] \rangle$.
3. $\lambda \bar{n}_1 = \langle [(1 - (1 - t_1)^\lambda), (1 - (1 - t_2)^\lambda), (1 - (1 - t_3)^\lambda), (1 - (1 - t_4)^\lambda), (1 - (1 - t_5)^\lambda), (1 - (1 - t_6)^\lambda)], [(i_1)^\lambda, (i_2)^\lambda, (i_3)^\lambda], [(i_4)^\lambda, (i_5)^\lambda, (i_6)^\lambda], [(f_1)^\lambda, (f_2)^\lambda, (f_3)^\lambda], [(f_4)^\lambda, (f_5)^\lambda, (f_6)^\lambda] \rangle$, for $\lambda > 0$.
4. $n_1^\lambda = \langle [(t_1)^\lambda, (t_2)^\lambda, (t_3)^\lambda], [(t_4)^\lambda, (t_5)^\lambda, (t_6)^\lambda], [1 - (1 - i_1)^\lambda, (1 - (1 - i_2)^\lambda), (1 - (1 - i_3)^\lambda), (1 - (1 - i_4)^\lambda), (1 - (1 - i_5)^\lambda), (1 - (1 - i_6)^\lambda)], [(1 - (1 - f_1)^\lambda), (1 - (1 - f_2)^\lambda), (1 - (1 - f_3)^\lambda), (1 - (1 - f_4)^\lambda), (1 - (1 - f_5)^\lambda), (1 - (1 - f_6)^\lambda)] \rangle$, for $\lambda > 0$.

Definition 2.2 ([9]). Let $\bar{n} = [(t_1, t_2, t_3), (t_4, t_5, t_6)], [(i_1, i_2, i_3), (i_4, i_5, i_6)], [(f_1, f_2, f_3), (f_4, f_5, f_6)]$ be an intuitionistic triangular neutrosophic number, then defined as their score functions

$$\begin{aligned}
 S(\bar{n}) &= \frac{1}{3} \left\{ 2 + \left(\frac{t_4 + 2t_5 + t_6}{4} - \frac{t_1 + 2t_2 + t_3}{4} \right) \right. \\
 (1) \quad & \left. - \left(\frac{i_4 + 2i_5 + i_6}{4} - \frac{i_1 + 2i_2 + i_3}{4} \right) - \left(\frac{f_4 + 2f_5 + f_6}{4} - \frac{f_1 + 2f_2 + f_3}{4} \right) \right\}, \\
 S(\bar{n}) &\in [-1, 1],
 \end{aligned}$$

where the higher value of $S(\bar{n})$ larger the intuitionistic triangular number \bar{n} .

3. Intuitionistic triangular neutrosophic fuzzy graph

Advantages of the proposed Algorithm

It is easy to understand a step wise representation and not dependent on any programming language. So we introduce Intuitionistic Triangular Neutrosophic Fuzzy Graph algorithm.

Merits of Proposed Algorithms:

1. It is a step-wise representation of a solution to a given problem, which makes it easy to understand.
2. An algorithm uses a definite procedure.
3. It is not dependent on any programming language, so it is easy to understand for anyone even without programming knowledge.
4. Every step in an algorithm has its own logical sequence so it is easy to debug.
5. By using algorithm, the problem is broken down into smaller pieces or steps hence, it is easier for programmer to convert it into an actual program.

Demerits of Proposed Algorithms:

1. Algorithms is Time consuming.
2. Difficult to show Branching and Looping in Algorithms.
3. Big tasks are difficult to put in Algorithms.

Algorithm:

In this research, we using proposed algorithm for finding shortest path.

Step 1. Let $d_1 = \langle [(0, 0, 0), (0, 0, 0)], [(1, 1, 1), (1, 1, 1)], [(1, 1, 1), (1, 1, 1)] \rangle$ the source node as $d_1 = \langle [(0, 0, 0), (0, 0, 0)], [(1, 1, 1), (1, 1, 1)], [(1, 1, 1), (1, 1, 1)] \rangle$.

Step 2. Find $d_j = \text{minimum}\{d_i + d_{ij}\}$, $j = 2, 3, \dots, n$.

Step 3. If the minimum value of i . i.e., $i = r$ then the label node j as $[d_j, r]$. If minimum arise related to more than one values of i . Their position we choose minimum value of i .

Step 4. Let the destination node be $[d_n, l]$. Here source node is d_n . We conclude a Score function and we finds minimum value of Intuitionistic Triangular Neutrosophic Number.

Step 5. We calculate Shortest Path Problem between source and destination node. Review the label of node 1. Let it be as $[d_n, A]$. Now review the label of node A and so on. Replicate the same procedure until node 1 is procured.

Step 6. The Shortest Path can be procured by combined all the nodes by the step 5.

4. Data analysis

To find Shortest Path on Chola period built temples using Intuitionistic Triangular Neutrosophic Fuzzy Graph.

In this chapter, AST denotes Amarasundreshwarar Temple, GKCT denotes Gangai konda cholapuram Temple, TKT denotes Thiruvanai Kovil Temple,

MKT denotes Moovar Kovil Temple, SST denotes Shri Suryanar Temple, BT denotes Brihadeeswarar Temple, and SAT denotes Shri Airavatesvara Temple.

Here, each node is converts as ITNFN.

Here, we consider source node is Amarasundreshwarar Temple and destination node is Airavatesvara temple. To find shortest path on Amarasundreshwarar Temple to Airavatesvara temple.

- Node 1 = Amarasundreshwarar Temple
- Node 2 = Gangai konda cholapuram Temple
- Node 3 = Thiruvanaai Kovil Temple
- Node 4 = Moovar Kovil Temple
- Node 5 = Shri Suryanar Temple
- Node 6 = Brihadeeswarar Temple
- Node 7 = Shri Airavatesvara Temple

The distance (km) between temples are considered as the edges of the graph. Considered distance are converted as Intuitionistic Triangular Neutrosophic Fuzzy Graph using the score function(fuzzification) of Intuitionistic Triangular Neutrosophic Fuzzy Graph.

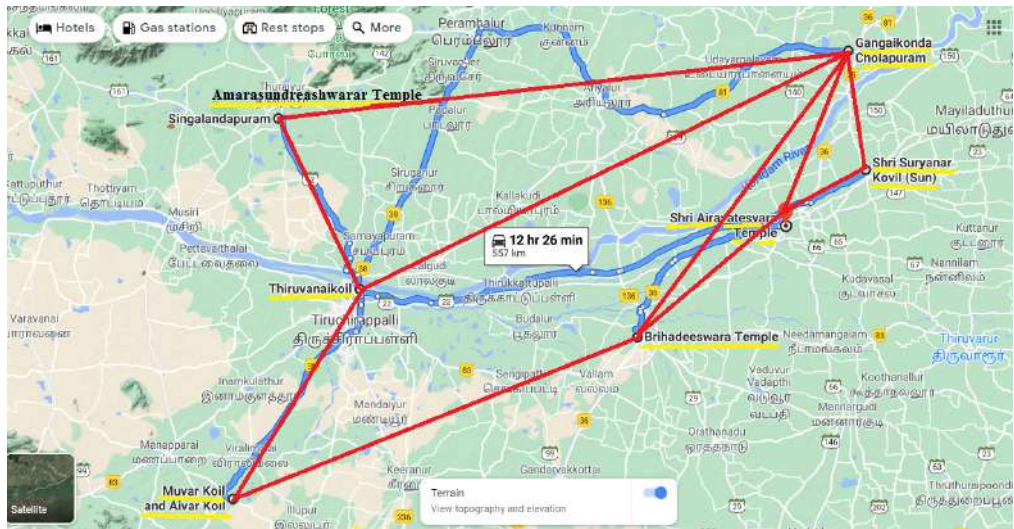


Figure 1: A graph of Chola period temples

Here, distance between one temple to another temple is calculated in kilometers. The numerical value of the distance is converted to Intuitionistic Triangular Neutrosophic Fuzzy Graphs with the help of through Neutrosophic Score function and trapezoidal signed distance.

The given distance (kilometer) converted to neutrosophic number $\frac{2+T-I-F}{3}$ (using score function). We converted neutrosophic number as (a_1, a_2, a_3) are

membership function & $(a_1^*, a_2^{*'}, a_3^{*'})$ are non-membership function. These functions converted to fuzzy triangular numbers using triangular signed distance $\frac{a_1+2a_2+a_3}{4}$. Finally, converted Intuitionistic Triangular Neutrosophic Fuzzy Number.

Here, Apply the Intuitionistic Triangular Neutrosophic Fuzzy Number in our algorithm to find shortest path to Chola period temples. In this application, many paths have chola period temples. To calculate Shortest Path using score function(Definition 2.1 and 2.2). An algorithm is used to apply a definite procedure and the process has been expensive and time consuming. Here node 1-2 = 117 km

This km changed to neutrosophic number use neutrosophic score function, and each neutrosophic number converted to fuzzification method, so we get fuzzy number. Finally we convert membership and non-membership from fuzzy number because of Intuitionistic fuzzy number, and use triangular signed distance to membership and non-membership functions. At last we get Intuitionistic Triangular Neutrosophic Fuzzy Number.

$$\begin{array}{ccc} 820 & 340 & 131 \\ 0.82 & 0.34 & 0.131 \\ (0.82,0.18) & (0.34,0.66) & (0.131,0.869) \end{array}$$

$$\left\langle [(0.65, 0.82, 0.99), (0.11, 0.18, 0.25)], [(0.16, 0.34, 0.52), (0.57, 0.66, 0.75)], \right.$$

$$\left. [(0.07, 0.131, 0.192), (0.813, 0.869, 0.925)] \right\rangle$$

1-3=35 km

$$\begin{array}{ccc} 350 & 142 & 105 \\ 0.85 & 0.142 & 0.105 \\ (0.35,0.65) & (0.142,0.858) & (0.105,0.895) \end{array}$$

$$\left\langle [(0.21, 0.35, 0.49), (0.49, 0.65, 0.81)], [(0.088, 0.142, 0.196), (0.744, 0.858, 0.972)], \right.$$

$$\left. [(0.018, 0.105, 0.192), (0.835, 0.895, 0.955)] \right\rangle$$

2-3=125 km

$$\begin{array}{ccc}
 955 & 425 & 157 \\
 0.955 & 0.425 & 0.157 \\
 (0.955, 0.045) & (0.425, 0.575) & (0.157, 0.843)
 \end{array}
 \left\langle
 \begin{array}{l}
 [(0.911, 0.955, 0.999), (0.029, 0.045, 0.061)], [(0.229, 0.425, 0.621), (0.425, 0.575, 0.725)], \\
 [(0.013, 0.157, 0.301), (0.722, 0.843, 0.964)]
 \end{array}
 \right\rangle$$

2-5=24 km

$$\begin{array}{ccc}
 316 & 172 & 74 \\
 0.316 & 0.172 & 0.074 \\
 (0.316, 0.684) & (0.172, 0.828) & (0.074, 0.926)
 \end{array}
 \left\langle
 \begin{array}{l}
 [(0.128, 0.316, 0.504), (0.556, 0.684, 0.812)], [(0.011, 0.172, 0.333), (0.721, 0.828, 0.935)], \\
 [(0.049, 0.074, 0.099), (0.873, 0.926, 0.979)]
 \end{array}
 \right\rangle$$

2-6=71 km

$$\begin{array}{ccc}
 650 & 330 & 109 \\
 0.65 & 0.33 & 0.109 \\
 (0.65, 0.35) & (0.33, 0.67) & (0.109, 0.891)
 \end{array}
 \left\langle
 \begin{array}{l}
 [(0.59, 0.65, 0.71), (0.17, 0.35, 0.53)], [(0.17, 0.33, 0.49), (0.51, 0.67, 0.83)], \\
 [(0.035, 0.109, 0.183), (0.826, 0.891, 0.956)]
 \end{array}
 \right\rangle$$

3-4=48 km

$$\begin{array}{ccc}
 465 & 220 & 103 \\
 0.465 & 0.22 & 0.103 \\
 (0.465, 0.535) & (0.22, 0.78) & (0.103, 0.897)
 \end{array}
 \left\langle
 \begin{array}{l}
 [(0.395, 0.465, 0.535), (0.455, 0.535, 0.615)], [(0.11, 0.22, 0.33), (0.71, 0.78, 0.85)], \\
 [(0.011, 0.103, 0.195), (0.821, 0.897, 0.973)]
 \end{array}
 \right\rangle$$

4-6=95 km

$$\begin{array}{ccc}
 950 & 435 & 232 \\
 0.95 & 0.435 & 0.232 \\
 (0.95,0.05) & (0.435,0.565) & (0.232,0.768)
 \end{array}
 \left\langle
 \begin{array}{l}
 [(0.91, 0.95, 0.99), (0.02, 0.05, 0.08)], [(0.333, 0.435, 0.537), (0.505, 0.565, 0.625)], \\
 [(0.149, 0.232, 0.315), (0.733, 0.768, 0.803)]
 \end{array}
 \right\rangle$$

5-6=54 km

$$\begin{array}{ccc}
 650 & 320 & 170 \\
 0.65 & 0.32 & 0.17 \\
 (0.65,0.35) & (0.32,0.68) & (0.17,0.83)
 \end{array}
 \left\langle
 \begin{array}{l}
 [(0.51, 0.65, 0.79), (0.24, 0.35, 0.46)], [(0.17, 0.32, 0.47), (0.6, 0.68, 0.76)], \\
 [(0.09, 0.17, 0.25), (0.69, 0.83, 0.97)]
 \end{array}
 \right\rangle$$

5-7=20 km

$$\begin{array}{ccc}
 180 & 72 & 50 \\
 0.18 & 0.072 & 0.05 \\
 (0.18,0.82) & (0.072,0.928) & (0.05,0.95)
 \end{array}
 \left\langle
 \begin{array}{l}
 [(0.09, 0.18, 0.27), (0.71, 0.82, 0.93)], [(0.045, 0.072, 0.099), (0.869, 0.928, 0.987)], \\
 [(0.03, 0.05, 0.07), (0.93, 0.95, 0.97)]
 \end{array}
 \right\rangle$$

6-7=20 km

$$\begin{array}{ccc}
 640 & 330 & 201 \\
 0.64 & 0.33 & 0.201 \\
 (0.64,0.36) & (0.33,0.67) & (0.201,0.799)
 \end{array}
 \left\langle
 \begin{array}{l}
 [(0.56, 0.64, 0.72), (0.28, 0.36, 0.44)], [(0.2, 0.33, 0.46), (0.59, 0.67, 0.75)], \\
 [(0.069, 0.201, 0.333), (0.737, 0.799, 0.861)]
 \end{array}
 \right\rangle$$

In this iteration SPP was calculated through the proposed algorithm, the concept of the Chola period temples shortest path calculated from Amarasundreshwarar Temple to Shri Airavatesvara Temple.

Let $n = 7$ is the destination node, since there are totally 7 nodes.

Iteration 1. Assume the source node is Amarasundreshwarar Temple. Here we assume $d_1 = \langle [(0,0,0), (0,0,0)], [(1,1,1), (1,1,1)], [(1,1,1), (1,1,1)] \rangle$ and label of source node is $\{ \langle [(0, 0, 0), (0, 0, 0)], [(1, 1, 1), (1, 1, 1)], [(1, 1, 1), (1, 1, 1)] \rangle, -- \}$ the value of $d_j, j = 2, 3, 4, 5, 6$ is succeeding. Here we assume d_1 is the Amarasundreshwarar Temple.

Iteration 2. The node Gangai konda cholapuram Temple has only node Amarasundreshwarar Temple as the predecessor. Intuitionistic Triangular Fuzzy Neutrosophic Shortest Path is calculated from Gangai konda cholapuram Temple to Amarasundreshwarar Temple. Since node 2 has only node 1 as the predecessor. So fix $i = 1$ and $j = 2$ we apply step 2 at proposed algorithm

$$\begin{aligned}
 d_2 &= \text{minimum}\{d_1 \oplus d_{12}\} \\
 &= \text{minimum} \left\{ \begin{aligned} &\langle [(0, 0, 0), (0, 0, 0)], [(1, 1, 1), (1, 1, 1)], [(1, 1, 1), (1, 1, 1)] \rangle \oplus \\ &\langle [(0.65, 0.82, 0.99), (0.11, 0.18, 0.25)], [(0.16, 0.34, 0.52), \\ &(0.57, 0.66, 0.75)], [(0.07, 0.131, 0.192), (0.813, 0.869, 0.925)] \rangle \end{aligned} \right\} \\
 &= \left\{ \begin{aligned} &\langle [(0.65, 0.82, 0.99), (0.11, 0.18, 0.25)], [(0.16, 0.34, 0.52), \\ &(0.57, 0.66, 0.75)], [(0.07, 0.131, 0.192), (0.813, 0.869, 0.925)] \rangle \end{aligned} \right\}
 \end{aligned}$$

Therefore, minimum value $i = 1$, corresponding to label node 2 as

$$\begin{aligned}
 &= \left\{ \begin{aligned} &\langle [(0.65, 0.82, 0.99), (0.11, 0.18, 0.25)], [(0.16, 0.34, 0.52), \\ &(0.57, 0.66, 0.75)], [(0.07, 0.131, 0.192), (0.813, 0.869, 0.925)], 1 \rangle \end{aligned} \right\} \\
 d_2 &= \left\{ \begin{aligned} &\langle [(0.65, 0.82, 0.99), (0.11, 0.18, 0.25)], [(0.16, 0.34, 0.52), \\ &(0.57, 0.66, 0.75)], [(0.07, 0.131, 0.192), (0.813, 0.869, 0.925)] \rangle \end{aligned} \right\}
 \end{aligned}$$

The labeled node is Gangai Konda Cholapuram and minimum provided corresponding node is Amarasundreshwarar Temple.

Minimum Node	Labeled Node	Path Node
AST	GKCT	$\langle [(0.65, 0.82, 0.99), (0.11, 0.18, 0.25)], [(0.16, 0.34, 0.52), (0.57, 0.66, 0.75)], [(0.07, 0.131, 0.192), (0.813, 0.869, 0.925)] \rangle$

Iteration 3. The node Thiruvanai Kovil Temple has two predecessors node, they are node Amarasundreshwarar Temple and node Gangai konda cholapuram Temple. Intuitionistic Triangular Fuzzy Neutrosophic Shortest Path is calculated to Thiruvanai Kovil from Amarasundreshwarar Temple and Gangai konda cholapuram. Since node 3 has two predecessors node 1 and node 2. So fix $i = 1, 2$ and $j = 3$ we apply step 2 at proposed algorithm.

$$\begin{aligned}
 d_3 &= \text{minimum}\{d_1 \oplus d_{13}, d_2 \oplus d_{23}\} \\
 &= \text{minimum} \left\{ \begin{aligned} &\langle [(0, 0, 0), (0, 0, 0)], [(1, 1, 1), (1, 1, 1)], [(1, 1, 1), (1, 1, 1)] \rangle \oplus \\ &\langle [(0.21, 0.35, 0.49), (0.49, 0.65, 0.81)], [(0.088, 0.142, 0.196), \\ &(0.744, 0.858, 0.972)], [(0.018, 0.105, 0.192), (0.835, 0.895, 0.955)] \rangle \\ &\langle [(0.65, 0.82, 0.99), (0.11, 0.18, 0.25)], [(0.16, 0.34, 0.52) \\ &(0.57, 0.66, 0.75)], [(0.07, 0.131, 0.192), (0.813, 0.869, 0.925)] \rangle \oplus \\ &\langle [(0.911, 0.955, 0.999), (0.029, 0.045, 0.061)], [(0.229, 0.425, 0.621) \\ &(0.425, 0.575, 0.725)], [(0.013, 0.157, 0.301), (0.722, 0.843, 0.964)] \rangle \end{aligned} \right\} \\
 &= \text{minimum} \left\{ \begin{aligned} &\langle [(0.21, 0.35, 0.49), (0.49, 0.65, 0.81)], [(0.088, 0.142, 0.196), \\ &(0.744, 0.858, 0.972)], [(0.018, 0.105, 0.192), (0.835, 0.895, 0.955)] \rangle, \\ &\langle [(0.9688, 0.9919, 0.999), (0.1358, 0.217, 0.2957)], [(0.0366, 0.1445, 0.323), \\ &(0.2422, 0.3795, 0.5437)], [(0.0009, 0.0205, 0.0577), (0.5869, 0.7325, 0.8917)] \rangle \end{aligned} \right\}
 \end{aligned}$$

Using equation (2.1), we have

$$\begin{aligned}
 S &\left\{ \begin{aligned} &\langle [(0.21, 0.35, 0.49), (0.49, 0.65, 0.81)], [(0.088, 0.142, 0.196), \\ &(0.744, 0.858, 0.972)], [(0.018, 0.105, 0.192), (0.835, 0.895, 0.955)] \rangle \end{aligned} \right\} \\
 S(\bar{n}_1) &= 0.2647
 \end{aligned}$$

$$\begin{aligned}
 S &\left\{ \begin{aligned} &\langle [(0.9688, 0.9919, 0.999), (0.1358, 0.217, 0.2957)], [(0.0366, 0.1445, 0.323), \\ &(0.2422, 0.3795, 0.5437)], [(0.0009, 0.0205, 0.0577), (0.5869, 0.7325, 0.8917)] \rangle \end{aligned} \right\} \\
 S(\bar{n}_2) &= 0.0978
 \end{aligned}$$

Therefore minimum value $i = 2$, corresponding to label node 3 as

$$\begin{aligned}
 &\left\{ \begin{aligned} &\langle [(0.9688, 0.9919, 0.999), (0.1358, 0.217, 0.2957)], [(0.0366, 0.1445, 0.323), \\ &(0.2422, 0.3795, 0.5437)], [(0.0009, 0.0205, 0.0577), (0.5869, 0.7325, 0.8917)] \rangle, 2 \end{aligned} \right\} \\
 d_3 &= \left\{ \begin{aligned} &\langle [(0.9688, 0.9919, 0.999), (0.1358, 0.217, 0.2957)], [(0.0366, 0.1445, 0.323), \\ &(0.2422, 0.3795, 0.5437)], [(0.0009, 0.0205, 0.0577), (0.5869, 0.7325, 0.8917)] \rangle \end{aligned} \right\}
 \end{aligned}$$

Here, the labeled node is Thiruvanai Kovil and the minimum provided corresponding node is Gangai konda cholapuram.

Minimum Node	Labeled Node	Path Node
GKCT	TKT	$\langle [(0.9688, 0.9919, 0.999), (0.1358, 0.217, 0.2957)], [(0.0366, 0.1445, 0.323), (0.2422, 0.3795, 0.5437)], [(0.0009, 0.0205, 0.0577), (0.5869, 0.7325, 0.8917)] \rangle$

Iteration 4. The node Moovar Kovil has only node Thiruvanai Kovil as the predecessor. Intuitionistic Triangular Fuzzy Neutrosophic Shortest Path is calculated to Moovar Kovil from Thiruvanai Kovil. Since node 4 has only node 3 as

the predecessor. So fix $i = 3$ and $j = 4$ we apply step 2 at proposed algorithm.

$$d_4 = \text{minimum}\{d_3 \oplus d_{34}\}$$

$$= \text{minimum} \left\{ \begin{array}{l} \langle \langle (0.9688, 0.9919, 0.999), (0.1358, 0.217, 0.2957) \rangle, [(0.0366, 0.1445, 0.323), \\ (0.2422, 0.3795, 0.5437)], [(0.0009, 0.0205, 0.0577), (0.5869, 0.7325, 0.8917)] \rangle \oplus \\ \langle \langle (0.395, 0.465, 0.535), (0.455, 0.535, 0.615) \rangle, [(0.11, 0.22, 0.33), \\ (0.71, 0.78, 0.85)], [(0.011, 0.103, 0.195), (0.821, 0.897, 0.973)] \rangle \end{array} \right\}$$

$$= \left\{ \begin{array}{l} \langle \langle (0.98, 0.995, 0.999), (0.529, 0.636, 0.728) \rangle, [(0.004, 0.032, 0.107), \\ (0.172, 0.296, 0.462)], [(0.000009, 0.002, 0.011), (0.482, 0.657, 0.868)] \rangle \end{array} \right\}$$

Therefore minimum value $i = 3$, corresponding to label node 4 as

$$= \left\{ \begin{array}{l} \langle \langle (0.98, 0.995, 0.999), (0.529, 0.636, 0.728) \rangle, [(0.004, 0.032, 0.107), \\ (0.172, 0.296, 0.462)], [(0.000009, 0.002, 0.011), (0.482, 0.657, 0.868)] \rangle, 3 \end{array} \right\}$$

$$d_4 = \left\{ \begin{array}{l} \langle \langle (0.98, 0.995, 0.999), (0.529, 0.636, 0.728) \rangle, [(0.004, 0.032, 0.107), \\ (0.172, 0.296, 0.462)], [(0.000009, 0.002, 0.011), (0.482, 0.657, 0.868)] \rangle \end{array} \right\}$$

Here, the labeled node is Moovar Kovil and the minimum provided corresponding node is Thiruvanai Kovil.

Minimum Node	Labeled Node	Path Node
TKT	MKT	$\langle \langle (0.98, 0.995, 0.999), (0.529, 0.636, 0.728) \rangle, [(0.004, 0.032, 0.107), (0.172, 0.296, 0.462)], [(0.000009, 0.002, 0.011), (0.482, 0.657, 0.868)] \rangle$

Iteration 5. The node Shri Suryanar Temple has only node Gangai konda cholapuram as the predecessor. Intuitionistic Triangular Fuzzy Neutrosophic Shortest Path is calculated to Shri Suryanar Temple from Gangai konda cholapuram. Since node 5 has only node 2 as the predecessor. So fix $i = 2$ and $j = 5$ we apply step 2 at proposed algorithm.

$$d_5 = \text{minimum}\{d_2 \oplus d_{25}\}$$

$$= \text{minimum} \left\{ \begin{array}{l} \langle \langle (0.65, 0.82, 0.99), (0.11, 0.18, 0.25) \rangle, [(0.16, 0.34, 0.52), \\ (0.57, 0.66, 0.75)], [(0.07, 0.131, 0.192), (0.813, 0.869, 0.925)] \rangle \oplus \\ \langle \langle (0.128, 0.316, 0.504), (0.556, 0.684, 0.812) \rangle, [(0.011, 0.172, 0.333), \\ (0.721, 0.828, 0.935)], [(0.049, 0.074, 0.099), (0.873, 0.926, 0.979)] \rangle \end{array} \right\}$$

$$= \left\{ \begin{array}{l} \langle \langle (0.695, 0.877, 0.995), (0.605, 0.741, 0.859) \rangle, [(0.002, 0.058, 0.173), \\ (0.411, 0.546, 0.701)], [(0.003, 0.0096, 0.019), (0.709, 0.805, 0.906)] \rangle \end{array} \right\}$$

Therefore minimum value $i = 2$, corresponding to label node 5 as

$$= \left\{ \begin{array}{l} \langle \langle (0.695, 0.877, 0.995), (0.605, 0.741, 0.859) \rangle, [(0.002, 0.058, 0.173), \\ (0.411, 0.546, 0.701)], [(0.003, 0.0096, 0.019), (0.709, 0.805, 0.906)] \rangle, 2 \end{array} \right\}$$

$$d_4 = \left\{ \begin{array}{l} \langle \langle (0.695, 0.877, 0.995), (0.605, 0.741, 0.859) \rangle, [(0.002, 0.058, 0.173), \\ (0.411, 0.546, 0.701)], [(0.003, 0.0096, 0.019), (0.709, 0.805, 0.906)] \rangle \end{array} \right\}$$

Here the labeled node is Shri Suryanar Temple and the minimum provided corresponding node is Gangai konda cholapuram.

Minimum Node	Labeled Node	Path Node
GKCT	SST	$\langle[(0.695, 0.877, 0.995), (0.605, 0.741, 0.859)], [(0.002, 0.058, 0.173), (0.411, 0.546, 0.701)], [(0.003, 0.0096, 0.019), (0.709, 0.805, 0.906)]\rangle$

Iteration 6. The node Brihadeeswarar Temple has three predecessors node, they are node Gangai konda cholapuram, node Moovar Kovil and node Shri Suryanar Temple. Intuitionistic Triangular Fuzzy Neutrosophic Shortest Path is calculated to Brihadeeswarar Temple from Gangai konda cholapuram, Moovar Kovil and Shri Suryanar Temple. Since node 6 has three predecessors . The predecessors are node 2, node 4 and node 5. So fix $i = 2, 4, 5$ and $j = 6$ we apply step 2 at proposed algorithm.

$$\begin{aligned}
 d_6 &= \text{minimum}\{d_2 \oplus d_{26}, d_4 \oplus d_{46}, d_5 \oplus d_{56}\} \\
 &= \text{minimum} \left\{ \begin{aligned} &\langle[(0.65, 0.82, 0.99), (0.11, 0.18, 0.25)], [(0.16, 0.34, 0.52), \\ &(0.57, 0.66, 0.75)], [(0.07, 0.131, 0.192), (0.813, 0.869, 0.925)]\rangle \oplus \\ &\langle[(0.59, 0.65, 0.71), (0.17, 0.35, 0.53)], [(0.17, 0.33, 0.49), \\ &(0.51, 0.67, 0.83)], [(0.035, 0.109, 0.183), (0.826, 0.891, 0.956)]\rangle \\ &\langle[(0.98, 0.995, 0.999), (0.529, 0.636, 0.728)], [(0.004, 0.032, 0.107), \\ &(0.172, 0.296, 0.462)], [(0.000009, 0.002, 0.011), (0.482, 0.657, 0.868)]\rangle \oplus \\ &\langle[(0.91, 0.95, 0.99), (0.02, 0.05, 0.08)], [(0.333, 0.435, 0.537), \\ &(0.505, 0.565, 0.625)], [(0.149, 0.232, 0.315), (0.733, 0.768, 0.803)]\rangle \\ &\langle[(0.695, 0.877, 0.995), (0.605, 0.741, 0.859)], [(0.002, 0.058, 0.173), \\ &(0.411, 0.546, 0.701)], [(0.003, 0.0096, 0.019), (0.709, 0.805, 0.906)]\rangle \oplus \\ &\langle[(0.51, 0.65, 0.79), (0.24, 0.35, 0.46)], [(0.17, 0.32, 0.47), \\ &(0.6, 0.68, 0.76)], [(0.09, 0.17, 0.25), (0.69, 0.83, 0.97)]\rangle \end{aligned} \right\} \\
 &= \text{minimum} \left\{ \begin{aligned} &\langle[(0.856, 0.937, 0.997), (0.2613, 0.467, 0.647)], [(0.0272, 0.1122, 0.2548), \\ &(0.291, 0.442, 0.6225)], [(0.0024, 0.014, 0.035), (0.671, 0.774, 0.884)]\rangle, \\ &\langle[(0.998, 0.9997, 0.99999), (0.538, 0.654, 0.749)], [(0.001, 0.014, 0.057), \\ &(0.087, 0.167, 0.289)], [(0.000001, 0.0005, 0.003), (0.353, 0.504, 0.697)]\rangle \\ &\langle[(0.85, 0.956, 0.999), (0.699, 0.832, 0.9238)], [(0.0003, 0.0185, 0.0813), \\ &(0.247, 0.371, 0.322)], [(0.0003, 0.002, 0.005), (0.489, 0.668, 0.879)]\rangle \end{aligned} \right\}
 \end{aligned}$$

Using equation (2.1),we have

$$\begin{aligned}
 S &\left\{ \langle[(0.856, 0.937, 0.997), (0.2613, 0.467, 0.647)], [(0.0272, 0.1122, 0.2548), \right. \\ &\quad \left. (0.291, 0.442, 0.6225)], [(0.0024, 0.014, 0.035), (0.671, 0.774, 0.884)]\rangle \right\} \\
 S(\bar{n}_1) &= 0.149
 \end{aligned}$$

$$S \left\{ \begin{array}{l} \langle [(0.998, 0.9997, 0.99999), (0.538, 0.654, 0.749)], [(0.001, 0.014, 0.057)], \\ (0.087, 0.167, 0.289)], [(0.000001, 0.0005, 0.003), (0.353, 0.504, 0.697)] \rangle \end{array} \right\}$$

$$S(\bar{n}_2) = 0.32662$$

$$S \left\{ \begin{array}{l} \langle [(0.85, 0.956, 0.999), (0.699, 0.832, 0.9238)], [(0.0003, 0.0185, 0.0813)], \\ (0.247, 0.371, 0.322)], [(0.0003, 0.002, 0.005), (0.489, 0.668, 0.879)] \rangle \end{array} \right\}$$

$$S(\bar{n}_3) = 0.3032$$

Therefore minimum value $i = 2$, corresponding to label node 6 as

$$d_3 = \left\{ \begin{array}{l} \langle [(0.856, 0.937, 0.997), (0.2613, 0.467, 0.647)], [(0.0272, 0.1122, 0.2548)], \\ (0.291, 0.442, 0.6225)], [(0.0024, 0.014, 0.035), (0.671, 0.774, 0.884)] \rangle, 2 \end{array} \right\}$$

$$d_3 = \left\{ \begin{array}{l} \langle [(0.856, 0.937, 0.997), (0.2613, 0.467, 0.647)], [(0.0272, 0.1122, 0.2548)], \\ (0.291, 0.442, 0.6225)], [(0.0024, 0.014, 0.035), (0.671, 0.774, 0.884)] \rangle \end{array} \right\}$$

Here, the labeled node is Brihadeeswarar Temple and the minimum provided corresponding node is Gangai konda cholapuram.

Minimum Node	Labeled Node	Path Node
GKCT	BT	$\langle [(0.856, 0.937, 0.997), (0.2613, 0.467, 0.647)], [(0.0272, 0.1122, 0.2548), (0.291, 0.442, 0.6225)], [(0.0024, 0.014, 0.035), (0.671, 0.774, 0.884)] \rangle$

Iteration 7. The node Shri Airavatesvara Temple has two predecessors node, they are node Shri Suryanar Temple and node Brihadeeswarar Temple. ITNSP is calculated to Shri Airavatesvara Temple from Shri Suryanar Temple and Brihadeeswarar Temple. Since node 7 has two predecessors node 5 and node 6. So fix $i = 5, 6$ and $j = 7$ we apply step 2 at proposed algorithm.

$$d_7 = \text{minimum}\{d_5 \oplus d_{57}, d_6 \oplus d_{67}\}$$

$$= \text{minimum} \left\{ \begin{array}{l} \langle [(0.695, 0.877, 0.995), (0.605, 0.741, 0.859)], [(0.002, 0.058, 0.173), \\ (0.411, 0.546, 0.701)], [(0.003, 0.0096, 0.019), (0.709, 0.805, 0.906)] \rangle \oplus \\ \langle [(0.09, 0.18, 0.27), (0.71, 0.82, 0.93)], [(0.045, 0.072, 0.099), \\ (0.869, 0.928, 0.987)], [(0.03, 0.05, 0.07), (0.93, 0.95, 0.97)] \rangle \end{array} \right\}$$

$$= \text{minimum} \left\{ \begin{array}{l} \langle [(0.856, 0.937, 0.997), (0.2613, 0.467, 0.647)], [(0.0272, 0.1122, 0.2548), \\ (0.291, 0.442, 0.6225)], [(0.0024, 0.014, 0.035), (0.671, 0.774, 0.884)] \rangle \oplus \\ \langle [(0.56, 0.64, 0.72), (0.28, 0.36, 0.44)], [(0.2, 0.33, 0.46), \\ (0.59, 0.67, 0.75)], [(0.069, 0.201, 0.333), (0.737, 0.799, 0.861)] \rangle \end{array} \right\}$$

$$= \text{minimum} \left\{ \begin{array}{l} \langle [(0.722, 0.899, 0.996), (0.885, 0.953, 0.99)], [(0.00009, 0.004, 0.017), \\ (0.357, 0.507, 0.692)], [(0.00009, 0.0005, 0.0013), (0.659, 0.765, 0.8788)] \rangle, \\ \langle [(0.93, 0.977, 0.999), (0.468, 0.659, 0.802)], [(0.005, 0.037, 0.1172), \\ (0.172, 0.296, 0.467)], [(0.0002, 0.003, 0.012), (0.494, 0.618, 0.761)] \rangle \end{array} \right\}$$

Using equation (2.1),we have

$$S \left\{ \begin{array}{l} \langle [(0.722, 0.899, 0.996), (0.885, 0.953, 0.99)], [(0.00009, 0.004, 0.017), \\ (0.357, 0.507, 0.692)], [(0.00009, 0.0005, 0.0013), (0.659, 0.765, 0.8788)] \rangle \\ S(\bar{n}_1) = 0.26339 \end{array} \right.$$

$$S \left\{ \begin{array}{l} \langle [(0.93, 0.977, 0.999), (0.468, 0.659, 0.802)], [(0.005, 0.037, 0.1172), \\ (0.172, 0.296, 0.467)], [(0.0002, 0.003, 0.012), (0.494, 0.618, 0.761)] \rangle \\ S(\bar{n}_2) = 0.2665 \end{array} \right.$$

Therefore minimum value $i = 5$, corresponding to label node 7 as

$$d_3 = \left\{ \begin{array}{l} \langle [(0.722, 0.899, 0.996), (0.885, 0.953, 0.99)], [(0.00009, 0.004, 0.017), \\ (0.357, 0.507, 0.692)], [(0.00009, 0.0005, 0.0013), (0.659, 0.765, 0.8788)] \rangle, 5 \\ \langle [(0.722, 0.899, 0.996), (0.885, 0.953, 0.99)], [(0.00009, 0.004, 0.017), \\ (0.357, 0.507, 0.692)], [(0.00009, 0.0005, 0.0013), (0.659, 0.765, 0.8788)] \rangle \end{array} \right.$$

The labeled node is Airavatesvara Temple and the minimum provided corresponding node is Shri Suryanar Temple.

Minimum Node	Labeled Node	Path Node
SST	AT	$\langle [(0.722, 0.899, 0.996), (0.885, 0.953, 0.99)], [(0.00009, 0.004, 0.017), (0.357, 0.507, 0.692)], [(0.00009, 0.0005, 0.0013), (0.659, 0.765, 0.8788)] \rangle$

Since Airavatesvara Temple is the destination node.We calculate SP to destination node to source node. Since

Labeled Node	Minimum Node
Shri Airavatesvara Temple	Shri Suryanar Temple
Shri Suryanar Temple	Gangai konda cholapuram
Gangai konda cholapuram	Amarasundreashwarar Temple

Therefore, the Chola period built temples Intuitionistic Triangular Neutrosophic Fuzzy Graph Shortest Path is

$$AST \rightarrow GKCT \rightarrow SST \rightarrow SST$$

5. The shortest path on Dijkstra’s algorithm

Edge weight suitable algorithm is Dijkstra’s algorithm. So here we conclude same type of Shortest Path through Dijkstra’s Algorithm.

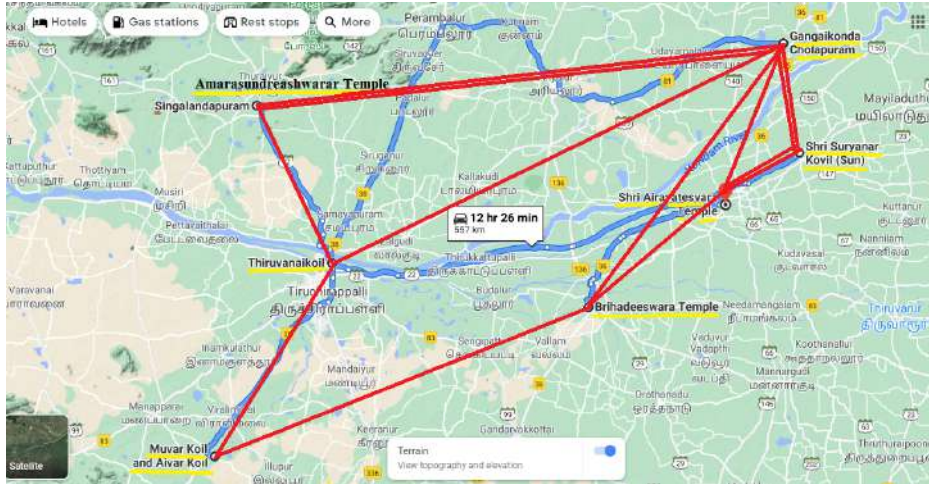


Figure 2: SP from Amarasundareswarar Temple to Airavateswara Temple

In the above real life application, we clarify another method of Shortest Path Problem using Dijkstra’s algorithm. In this Shortest Path Problem, we use direct method of Dijkstra’s algorithm and we assume edge weight is Chola period temples km.

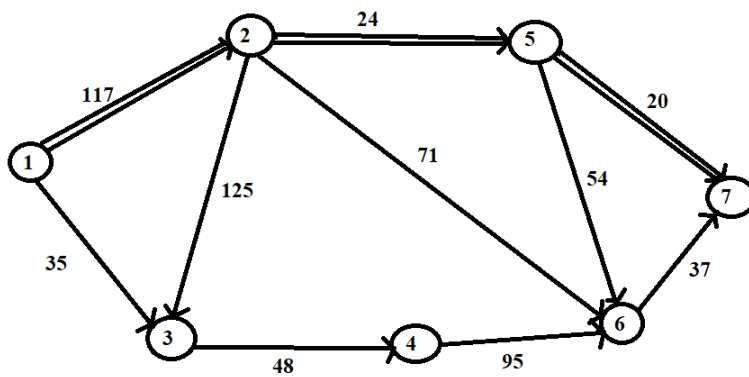


Figure 3: SP for Dijkstra’s Algorithm

Here, we verify Chola period buildted temples shortest path through Dijkstra's Algorithm. We have the paths are

$$1 \rightarrow 2 \rightarrow 5 \rightarrow 7$$

Here, the intuitionistic triangular Neutrosophic fuzzy graphs and Dijkstra's Algorithm are same. The shortest path is

$$1 \rightarrow 2 \rightarrow 5 \rightarrow 7$$



DIJKSTRA'S ALGORITHM PYTHON PROGRAM

Python program has been used to verify the result of Dijkstra's Algorithm. It can be accessed early and checked properly.

```

import sys

def to_be_visited():
    global visited_and_distance
    v = -10

    for index in range(number_of_vertices):
        if visited_and_distance[index][0] == 0 and
        (v < 0 or visited_and_distance[index][1]
        <= visited_and_distance[v][1]):
            v = index
    return v

vertices = [[0,1,1,0,0,0,0],
            [0,0,1,0,1,1,0],
            [0,0,0,1,0,0,0],
            [0,0,0,0,0,1,0],
            [0,0,0,0,0,1,1],
            [0,0,0,0,0,0,1],
            [0,0,0,0,0,0,0]]
edges = [[0,117,35,0,0,0,0],
         [0,0,125,0,24,71,0],
  
```

```

        [0,0,0,48,0,0,0],
        [0,0,0,0,0,95,0],
        [0,0,0,0,0,54,20],
        [0,0,0,0,0,0,37],
        [0,0,0,0,0,0,0]]

number_of_vertices = len(vertices[0])

visited_and_distance = [[0, 0]]
for i in range(number_of_vertices-1):
    visited_and_distance.append([0, sys.maxsize])

for vertex in range(number_of_vertices):

    to_visit = to_be_visited()
    for neighbor_index in range(number_of_vertices):
        if vertices[to_visit][neighbor_index] == 1 and
            visited_and_distance[neighbor_index][0] == 0:
            new_distance = visited_and_distance[to_visit][1] +
                edges[to_visit][neighbor_index]

            if visited_and_distance[neighbor_index][1] > new_distance:
                visited_and_distance[neighbor_index][1] = new_distance
            visited_and_distance[to_visit][0] = 1

    i = 0

for distance in visited_and_distance:
    print("The shortest distance of ",chr(ord('a') + i), "
    from the source vertex a is:",distance[1])
    i = i + 1

```

Output for the above program

```

The shortest distance of  a  from the source vertex a is: 0
The shortest distance of  b  from the source vertex a is: 117
The shortest distance of  c  from the source vertex a is: 35
The shortest distance of  d  from the source vertex a is: 83
The shortest distance of  e  from the source vertex a is: 141
The shortest distance of  f  from the source vertex a is: 178
The shortest distance of  g  from the source vertex a is: 161

```

6. Conclusion

In this article, discovering Shortest Path on Chola period temples using Intuitionistic Triangular Neutrosophic Fuzzy Graph. We use Neutrosophic score function and Triangular signed distance for fuzzification of membership and non-membership function. Intuitionistic Triangular Neutrosophic Fuzzy Number Score function is used to calculate Shortest Path of Intuitionistic Triangular Neutrosophic Fuzzy Graph. A genuine application is given to act as an Intuitionistic Triangular Neutrosophic Fuzzy Graph. Finally most brief way Shortest Path on Chola period buildted temples verified with Dijkstra's algorithm through the long last Python Jupyter Notebook (form) programming.

Futuristic work

In future shortest path problem can be applied by using Kruskal's Algorithm. We can verified by applying transportation Problem and Decision making problem. All weightage fuzzy number will be incorporated to find the shortest route of traffic or human intervention practical problem.

References

- [1] R.K. Ahuja, K. Mehlhrn, J.B. Orlin, R.E. Tarjan, *Faster algorithms for the shortest path problem*, J. ACM, (1990), 213-223.
- [2] H. Arsham, *Stability analysis for the shortest path problem*, Conf. J. Number Themes, (1998), 171-210.
- [3] V. Anusuya, R. Sathya, *Shortest path with complement of type-2 fuzzy number*, Malya Journal of Matematik, (2013), 71-76.
- [4] S. Broumi, A. Bakali, T. Mohamed, F. Smarandache, L. Vladareanu, *Shortest path problem under triangular fuzzy neutrosophic information*, In 10th International Conference on Software, Knowledge, Information Management and Applications (SKIMA), (2016), 169-174.
- [5] S. Broumi, T. Mohamed, A. Bakali, F. Smarandache, *Single valued neutrosophic graphs*, J. New Theory, (2016), 86-101.
- [6] S. Broumi, T. Mohamed, A. Bakali, F. Smarandache, K.K. Krishnan, *Shortest path problem on single valued neutrosophic graphs*, International Symposium on Networks, Computers and Communications, 2017.
- [7] S. Broumi, A. Bakali, M. Talea, F. Smarandache, M. Ali, *Shortest path under bipolar neutrosophic setting*, Appl. Mech. Mater., 859 (2017), 59-66.
- [8] S. Broumi, A. Bakali, M. Talea, F. Smarandache, P.K. Kishore, R. Sachin, *Shortest path problem under interval-valued neutrosophic setting*, Int. J. Adv. Trends Compt. Sci. Eng., 8 (2019), 216-222.

- [9] Jana Chiranjibe, Pal Madhumangal, Faruk Karaaslan, Jian-qiang Wang, *Trapezoidal neutrosophic aggregation operators and its application in multiple attribute decision making process*, 2018.
- [10] P.K. De, Bhinchar Amita, *Computation of Shortest Path in a fuzzy network*, International Journal Computer Applications, 11 (2010), 0975-8887.
- [11] P.K. De, Das Debaroti, *A study on ranking of trapezoidal intuitionistic fuzzy numbers*, International Journal of Computer Information Systems and Industrial Management Applications, 6, 437-444.
- [12] M. Enayattabar, A. Ebrahimnejad, H. Motameni, *Dijkstra algorithm for shortest path problem under interval-valued pythagorean fuzzy environment*, Complex Intell. Syst., (2018), 1-8.
- [13] C. Jana, M. Pal, F. Karaaslan, J.-Q. Wang, *Trapezoidal neutrosophic aggregation operators and their application to the multi-attribute decision-making process*, Scientia Iranica, Transactions E: Industrial Engineering, 27, 1655-1673.
- [14] P. Jayagowri, G.G. Ramani, *Using trapizoidal intuitionistic fuzzy number to find optimized path in a network*, Advances in Fuzzy Systems, (2014).
- [15] K. Kalaiarasi, M. Sumathi, S. Daisy, *Optimization of fuzzy EOQ model with unit time depended constant demand and shortage*, International Journal of Mechanical Engineering and Technology, 9 (2018), 1520-1527.
- [16] K. Kalaiarasi, S. Sumathi, H. Mary Henrietta, *Optimization of fuzzy inventory EOQ model using Kuhn-Tucker method*, Jour. of Adv. Research in Dynamical & Control Systems, 11 (2019).
- [17] A. Kumar, K. Kaur, *A new algorithm for solving shortest path problem on a network with imprecise edge weight*, Applications and Applied Mathematics, 6 (2011) 602-619.
- [18] G. Kumar, R.K. Bajaj, N. Gandotra, *Algorithm for shortest path problem in a network with interval valued intuitionistic trapezoidal fuzzy number*, Procedia Computer Science, 70 (2015) 123-129.
- [19] R. Kumar, S.A. Edaltpanah, S. Jha, S. Broumi, A. Dey, *Neutrosophic shortest path problem*, Neutrosophic Sets. Syst., 23 (2018), 5-15.
- [20] S. Majumdar, A. Pal, *Shortest path problem on intuitionistic fuzzy network*, Annals of Pure and Applied Mathematics, 5 (2013), 26-36.
- [21] A. Nagoor Gani, M. Mohamed Jabarulla, *On searching intuitionistic fuzzy shortest network*, Applied Mathematical Science, 69 (2010), 3447-3454.

- [22] Nathaniel Akpofure Ojekudo, Nsikan Paul Akpan, *An application of Dijkstra's algorithm to shortest path problem*, IOSR Journal of Mathematics, 13, 20-32.
- [23] Said Broumi, Assia Bakali, Mohamed Talea, Florentin Smarandache, *Shortest path problem under trapezoidal neutrosophic information*, Computing Conference, (2017), 142-148.
- [24] F. Smarandache, *A unifying field in logic neutrosophy: neutrosophic probability*, Set, Logic, 4th edn. American Research Press, Rehoboth, (2005).
- [25] Victor Christianto, Florentin Smarandache, *Remark on artificial intelligence*, Humanoid and Terminator Scenario: A neutrosophic Way to Futurology, International Journal of Neutrosophic Science, 1, 08-13.
- [26] H. Wang, F. Smarandache, Y. Zhang, R. Sunderraman, *Single value neutrosophic sets*, Multisp. Multistruct., (2010), 410-413.
- [27] Z.S. Xu, *Methods for aggregating interval-valued intuitionistic fuzzy information and their application to decision making*, Control and Decision, 22 (2007), 215-219.
- [28] C.D. Yang, D.T. Lee, C.K. Wong, *On bends and lengths of rectilinear paths: a graph theoretic approach*, Int. J. Comput. Geom. Appl., 2 (1992), 61-74.
- [29] J. Ye, *Trapezoidal fuzzy neutrosophic set and its application to multiple attribute decision making*, Neural Computing and Applications, 2014.
- [30] J. Ye, *Multi criteria decision-making method using the Dice similarity measure between expected intervals of trapezoidal fuzzy numbers*, Journal of Decision Systems, 21 (2012), 307-317.
- [31] J. Ye, *Prioritized aggregation operators of trapezoidal intuitionistic fuzzy sets and their application to multi-criteria decision making*, Neural. Comput. Appl., (2014), 1447-1454.

Accepted: November 17, 2021